


# INTERPUMP COMPRESSOR

## TFDC011B

### APPLICATIONS :

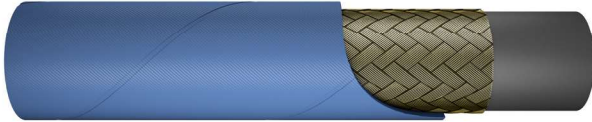

### APPLICABLE SPECS. :

IMM - EXCEED EN 853 1SN

Pinpricked hose for compressor. Do not use with bio-oil.

**Internal hose:** Synthetic rubber, extruded whole without joints, of uniform thickness.

**Reinforcement:** 1 steel wire braid.

**Covering:** Anti-abrasive synthetic rubber, resistant to oils, fuels and atmospheric conditions.

**Recommended fluid:** Mineral oils, glycols and polyglycols, trasmission fluids, air, air with oil vapours, mineral oils in aqueous emulsion (up to +212°F/ + 100°C).

**Operating temperature:** from -40 to +120°C (intermittent 135°C).

Part number	ID		Size	OD	Max WP		Min BP		Min BR		Weight		Ferrule
	in	mm		mm	bar	psi	bar	psi	mm	inch	kg/m	lb/ft	
	TFDC011B04	1/4"	6.4	4	13.4	225	3263	900	13050	100	3.937	0.24	0.161
TFDC011B05	5/16"	8.0	5	15.0	215	3118	850	12325	115	4.528	0.278	0.187	0001-05
TFDC011B06	3/8"	9.5	6	17.4	180	2610	720	10440	130	5.118	0.367	0.247	0001-06
TFDC011B08	1/2"	12.7	8	20.6	160	2320	640	9280	180	7.087	0.437	0.294	0001-08
TFDC011B10	5/8"	16.0	10	23.7	130	1885	520	7540	200	7.874	0.524	0.352	0001-10
TFDC011B12	3/4"	19.0	12	27.7	105	1523	420	6090	240	9.449	0.653	0.439	0001-12
TFDC011B16	1 "	25.4	16	35.6	88	1276	350	5075	300	11.811	1.001	0.673	0001-16
TFDC011B20	1.1/4"	31.8	20	43.5	63	914	250	3625	420	16.535	1.435	0.964	0001-20
TFDC011B24	1.1/2"	38.1	24	54.6	50	725	200	2900	500	19.685	1.711	1.150	0001-24
TFDC011B32	2 "	50.8	32	66.9	40	580	160	2320	630	24.803	2.357	1.584	0001-32

Compressed air applications require additional safety devices. Hoses are not designed and not approved for "air brake" applications.

MARKING: Available only "embossed"